## MECHANICAL FAUCETS 980-WSV937CHAGVSAM

## **Needle Valves**

#### **Product Type**

Deck Mounted Single Needle Valves Turret with Single Needle Valve

#### **Features & Specifications**

- Single Needle Valves
- Full Flow Nozzle
- 2-1/2" Cross Handle
- Shank Assembly, Male Thread
- May Be Used with Most Laboratory Gases
- 937 Valve is Certified for Gas Service per ANSI

Z21.15b-2006/CSA 9.1b-2006 by the Canadian Standards Association

#### **Performance Specification**

- Rated Operating Pressure: 0-0.5
- Rated Operating Temperature: °F
- The antimicrobial protection is formulated to last beyond the useful life of the product on an undamaged surface.

PSI

#### Warranty

- Lifetime Limited Faucet Warranty
- 5-Year Limited Cartridge Warranty
- 1-Year Limited Finish Warranty



| Job Name              |                              |
|-----------------------|------------------------------|
| Item Number           |                              |
| Section/Tag           |                              |
| Model Specified       |                              |
| Architect             |                              |
| Engineer              |                              |
| Contractor            |                              |
| [] Submitted as Shown | [] Submitted with Variations |
| Date                  |                              |




# 980-WSV937CHAGVSAM

### **Needle Valves**



#### **Architect/Engineer Specification**

Chicago Faucets No. 980-WSV937CHAGVSAM, Deck Mounted Single Needle Valves Turret with Single Needle Valve, Satin Antimicrobial plated solid brass construction. Full Flow Laboratory Serrated Nozzle. 2-1/2" Metal Cross handle(s) with Eight Point Tapered Broach and AIR, GAS or VAC Button. Shank Assembly, Male Thread. May Be Used with Most Laboratory Gases. 937 Valve is Certified for Gas Service per ANSI Z21.15b-2006/CSA 9.1b-2006 by the Canadian Standards Association. Mounting hardware included.

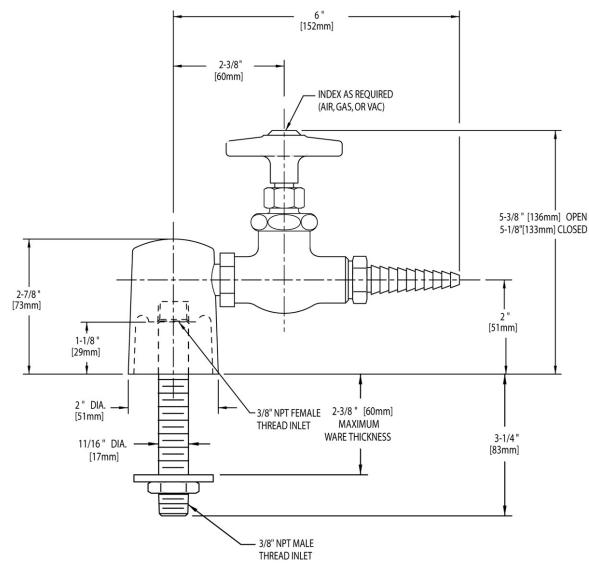

#### **Operation and Maintenance**

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at <a href="http://www.chicagofaucets.com">www.chicagofaucets.com</a>.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.



2100 South Clearwater Drive Des Plaines, IL P: 847/803-5000 F: 847/803-5454 Technical: 800/TEC-TRUE www.chicagofaucets.com

Last Revision: 04/12/2012 • Date Printed: 12/12/2013 • Product specifications subject to change without notice