

**116.214.AB.1****HyTronic™ Gooseneck Wall Mounted Single Hole Faucet - DC****PRODUCT TYPE**

Wall mounted single hole faucet

**FEATURES & SPECIFICATIONS**

- Polished chrome plated finish
- ECAST™ design provides durable brass construction with total lead content less than 0.25% by weighted average
- Efficient dual beam infrared sensors
- 5 3/8" C-C Rigid/Swing field convertible gooseneck spout, catalog #GN2AH8
- .5 GPM (1.9 L/min) vandal resistant spray outlet, catalog #E2805-5
- Includes optional 2.2 GPM (8.3 L/min) pressure compensating aerator insert
- Inlet supply check valves
- Multiple field adjustable modes and ranges
- 6 V Lithium CRP2 battery included
- Low battery indicator
- Concealed internal temperature control mixer
- Dual supply for hot and cold water service
- Above deck hermetically sealed electronics
- Above deck water-tight solenoid with filter screen
- Flexible braided stainless steel supply hoses with filter screens
- Geberit Commander™ software compatible
- Mounting hardware included

**OPTIONAL ACCESSORIES**

- Thermostatic mixing valve

**PERFORMANCE SPECIFICATION**

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140° F
- 3-Year Battery Life or Approximately 200,000 Uses

**WARRANTY**

- 5-Year Limited Mechanicals Warranty
- 3-Year Limited Electronics and Solenoid Warranty
- 1-Year Limited Finish Warranty

**COMPLIANT TO**

- CA AB1953 (2006)
- ASME A112.18.1M
- ADA ANSI/ICC A117.1
- VT S.152
- CSA B125

Job Name	_____
Item Number	_____
Section/Tag	_____
Model Specified	_____
Architect	_____
Engineer	_____
Contractor	_____
<input type="checkbox"/> Submitted as Shown	<input type="checkbox"/> Submitted with Variations
Date	_____




## 116.214.AB.1

### HyTronic™ Gooseneck Wall Mounted Single Hole Faucet - DC

#### ARCHITECT/ENGINEER SPECIFICATION

Chicago Faucets No. 116.214.AB.1, Polished chrome plated. 6 V Lithium CRP2 battery (included). Low battery indicator. 5 3/8" C-C rigid/swing field convertible gooseneck spout with .5 GPM vandal resistant spray outlet. Multiple field adjustable modes and ranges. Dual supply for hot and cold water service. Concealed internal temperature control mixer. Above deck hermetically sealed electronics module and solenoid with filter screen. Inlet supply check valves. Flexible stainless steel supply hoses with filter screens. Mounting hardware included. This product meets ADA ANSI/ICC A117.1 requirements and is tested and certified to industry standards: ASME A112.18.1, CSA B125, CA AB1953 (2006) and VT S.152.

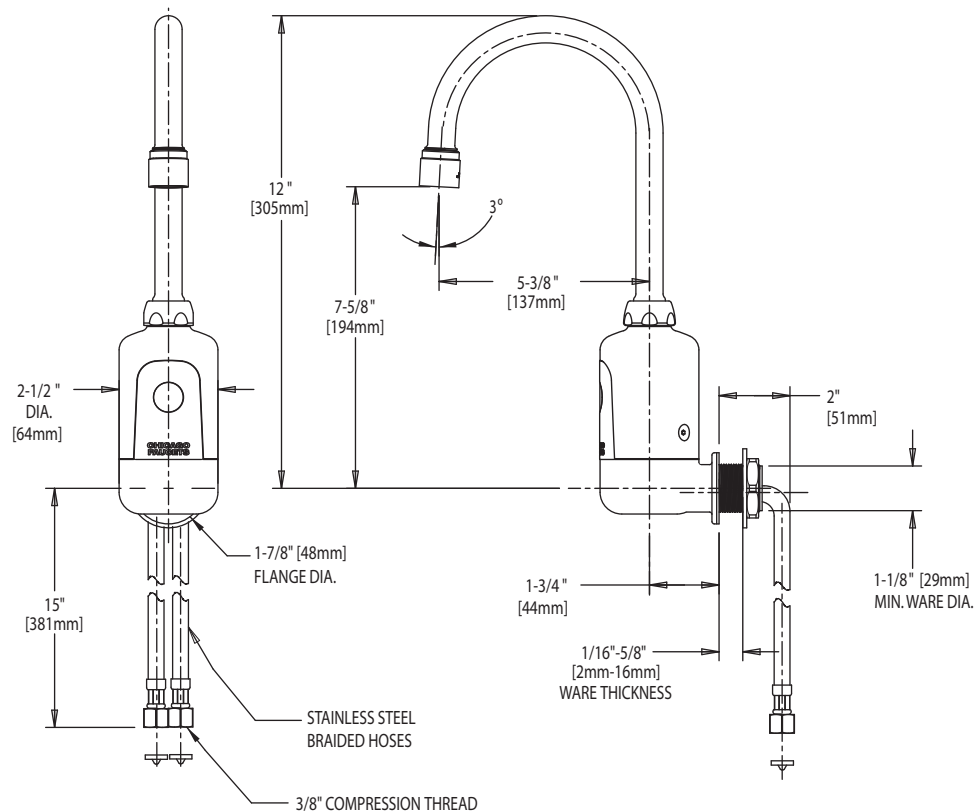

#### OPERATION AND MAINTENANCE

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning this product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at [www.chicagofaucets.com](http://www.chicagofaucets.com).

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.

2100 South Clearwater Drive  
 Des Plaines, IL 60018  
 P: 847/803-5000  
 F: 847/803-5454  
 Technical: 800/TEC-TRUE  
[www.chicagofaucets.com](http://www.chicagofaucets.com)

